


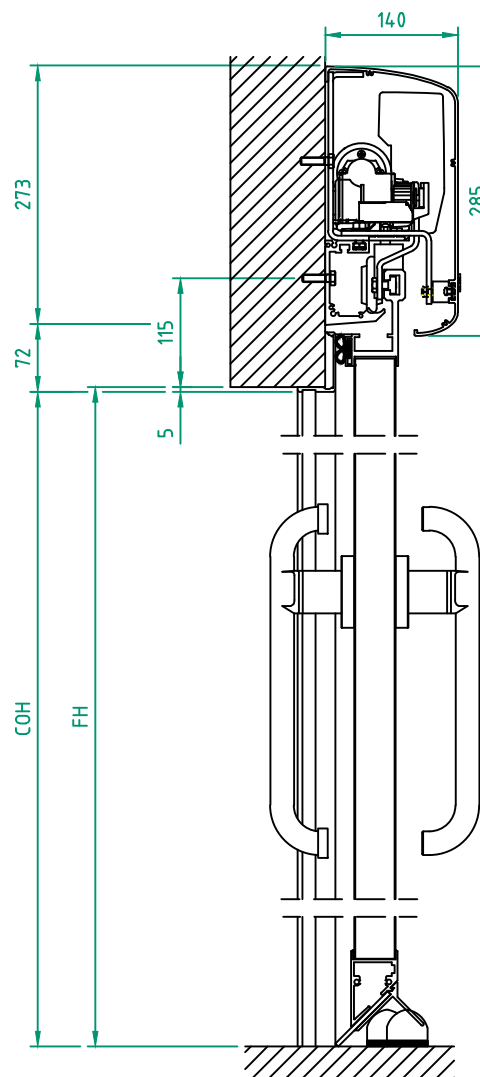

State when ordering

FW=.....mm
FH=.....mm
COW=.....mm
COH=.....mm
☐ Cover
CL=.....mm
EAC=.....mm
EAO=.....mm

Surface treatment

☐ Silver anodized
Special anodized.....
RAL.....
Special powder coating.....
.....

Note: When DW ≥ 1500 mm or the customer required face plate color not in the sales list, a 200 mm wide and 1.2 mm thick stainless decorative plate will be added at a height of 950 mm on both side, the decorative plate should be flush with the face plate.

Door leaf and Reveal plate

☐ HPL ☐ Colour.....
☐ Brush stainless

Window

☐ No window
☐ Round window D=400mm
☐ Square (WxH) 600x400 mm
WH=mm

Glass

☐ Double glazing, flush both sides (2x5mm)

Handle

☐ No handle
☐ Recessed handle, OP side
☐ Recessed handle, NON OP side
☐ Recessed handle both side
☐ Fixed handle, OP side
☐ Fixed handle, NON OP side
☐ Fixed handle both side
☐ Rotate handle

Door lock

☐ Electromechanical lock

FW= Frame width (structural) (COW+145)
Min. 945 / max. 2620

FH= Frame height (structural) (COH+5)
Min. 1905 / max. 3000

COW= Clear Opening Width (FW-145)

COH= Clear Opening Height (FH-5)



CL= Cover Length (2COW+420+EAC+EAO)
Max. 5370mm

EAC End adjustment at closing position

EAO End adjustment at opening position
EAC/EAO: Min. 0 / max. 600

WH= Window Height (centre)
(standard=1500mm)

WxH= Width x Height

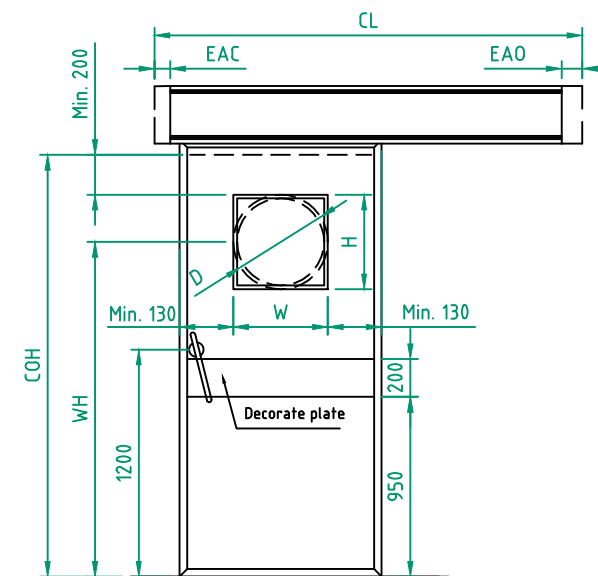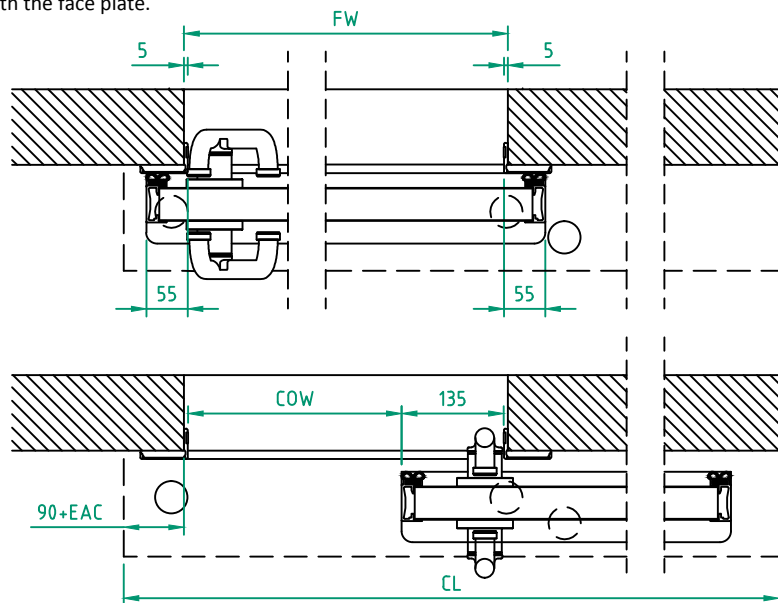

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Automatic door system
Hermetic UniSlide, opening right
without reveal plate
Article No. 1017959

ASSA ABLOY

2.0

1017360