
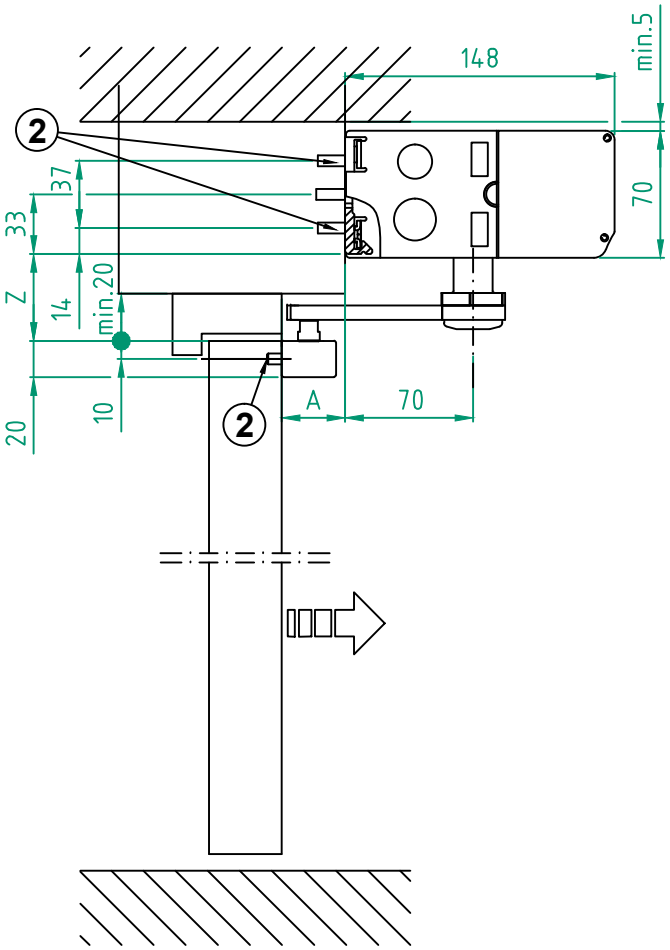


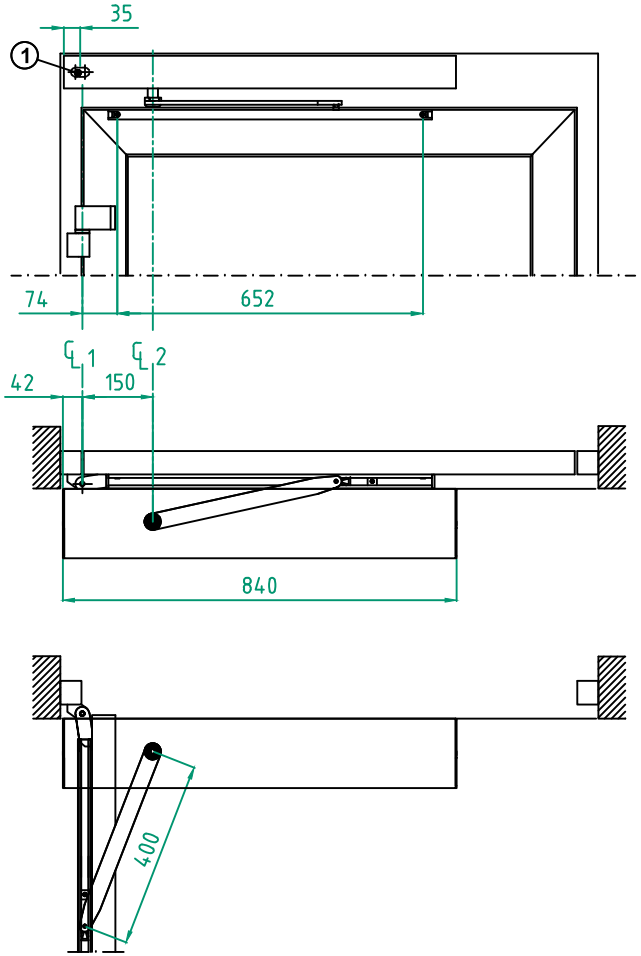

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm

R = ... mm
S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PULL, DIN Left

ASSA ABLOY

17.0 | 1009168-en

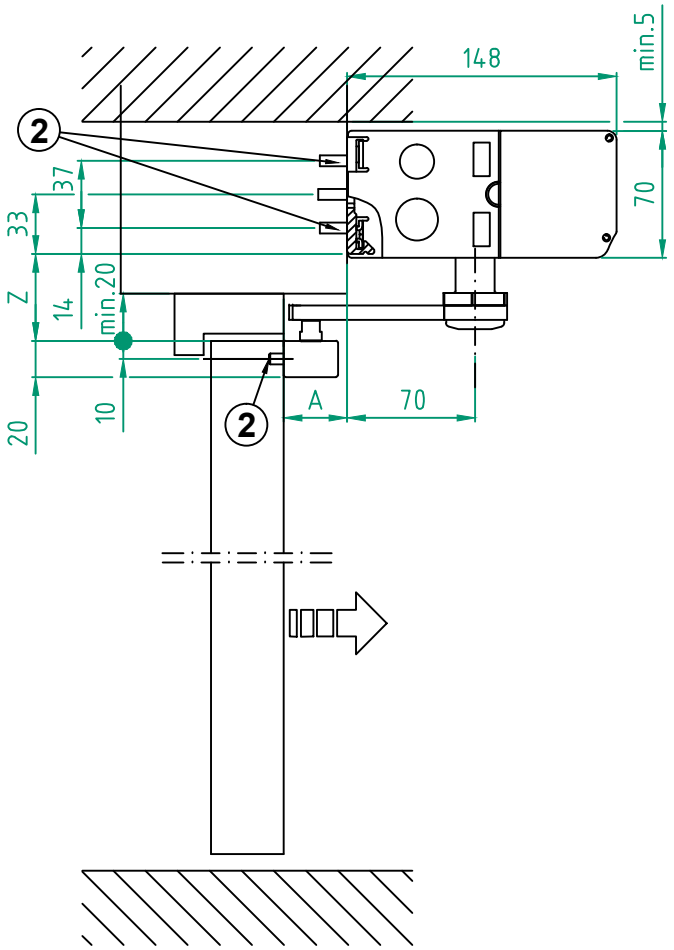

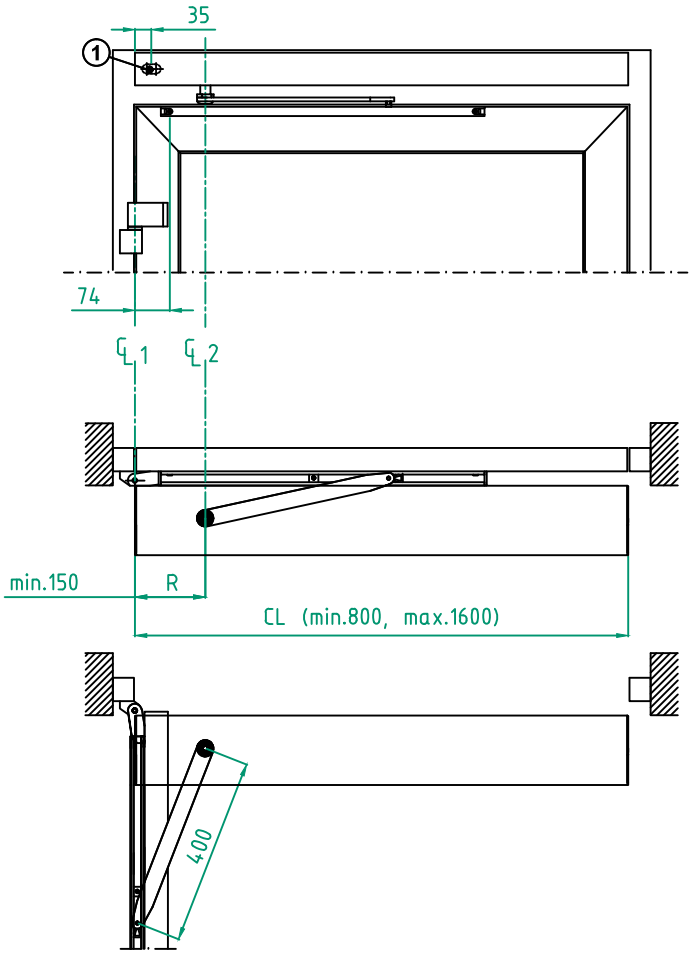

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm

R = ... mm
S = ... mm

If R or S is set to "0", no cutouts will be made.
Note! No space for battery if R/S<192

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70

© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:


Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PULL arm with shorty cover, DIN Left


ASSA ABLOY


17.0

1009168-en

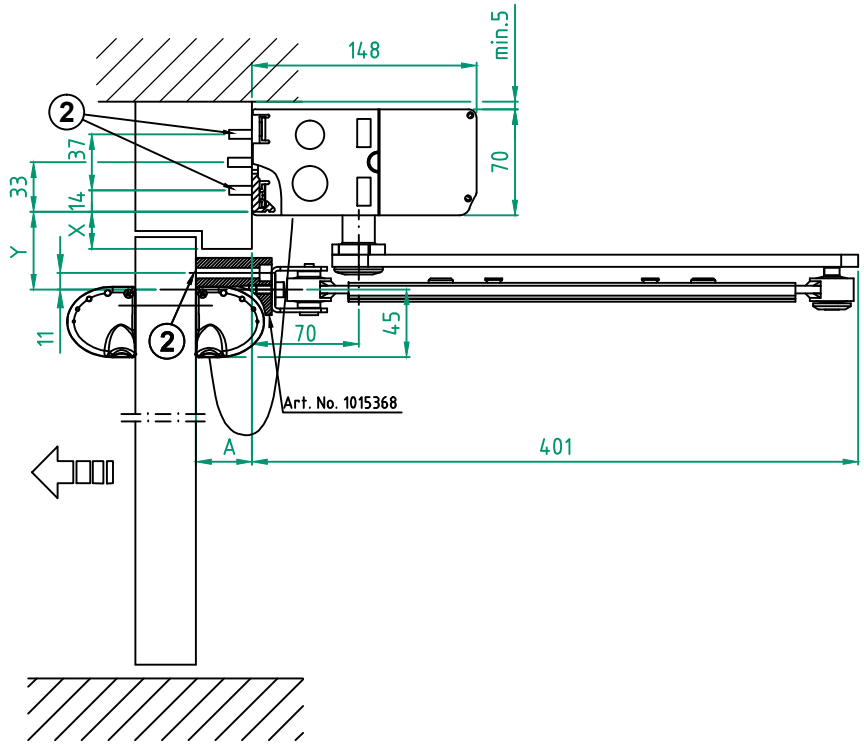

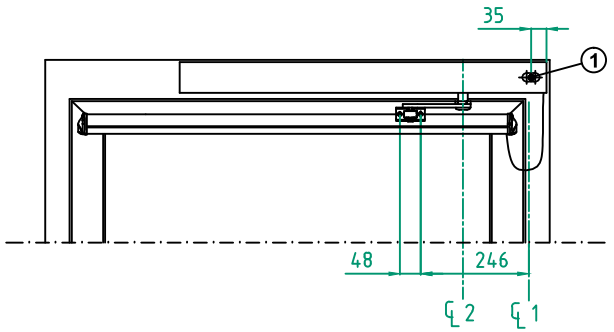

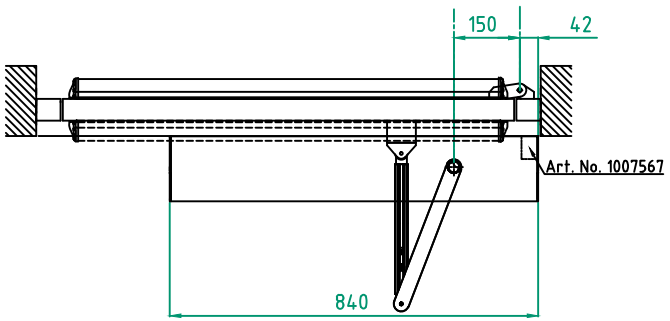

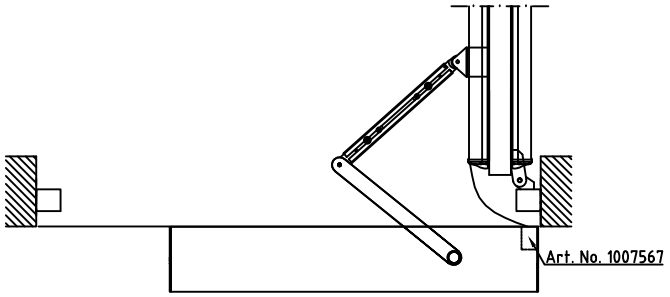

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm

R = ... mm
S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft

1 = Cable inlet
2 = Reinforcements required

Extension	A
0	0-22
345	22-137
230+joint part	137-252
345+230+joint part	252-367

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PUSH, DIN Left

ASSA ABLOY

17.0 | 1009168-en

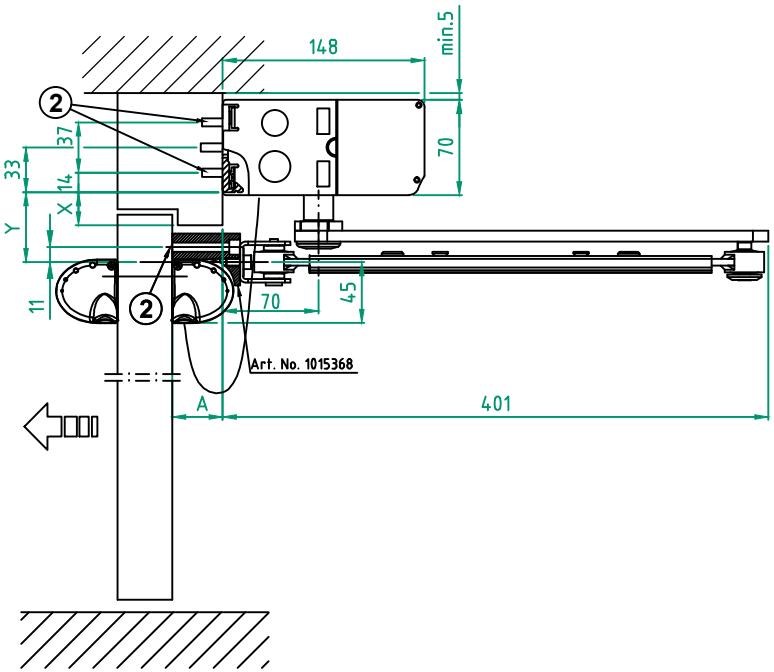

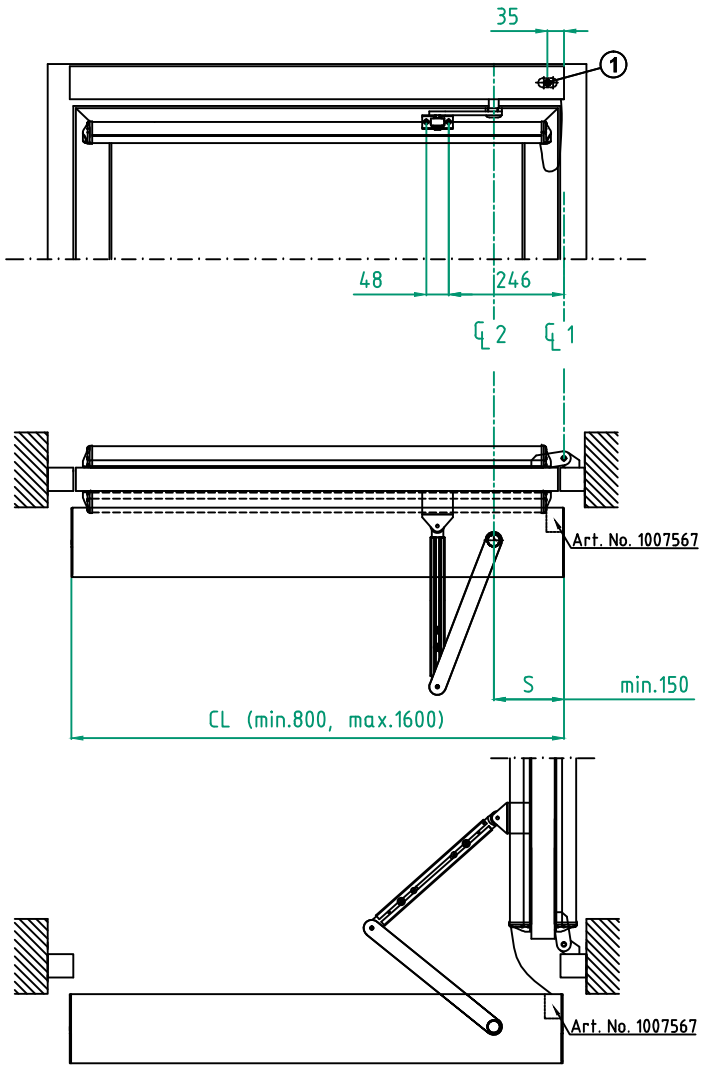

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm
  R = ... mm
  S = ... mm

If R or S is set to "0", no cutouts will be made.
Note! No space for battery if R/S<192

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PUSH arm with shorty cover, DIN Left

ASSA ABLOY

17.0 | 1009168-en

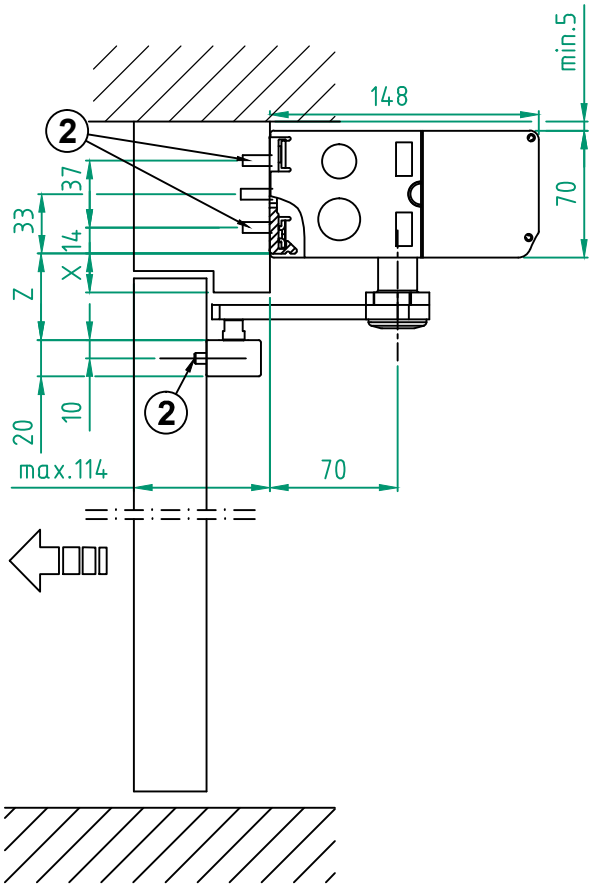

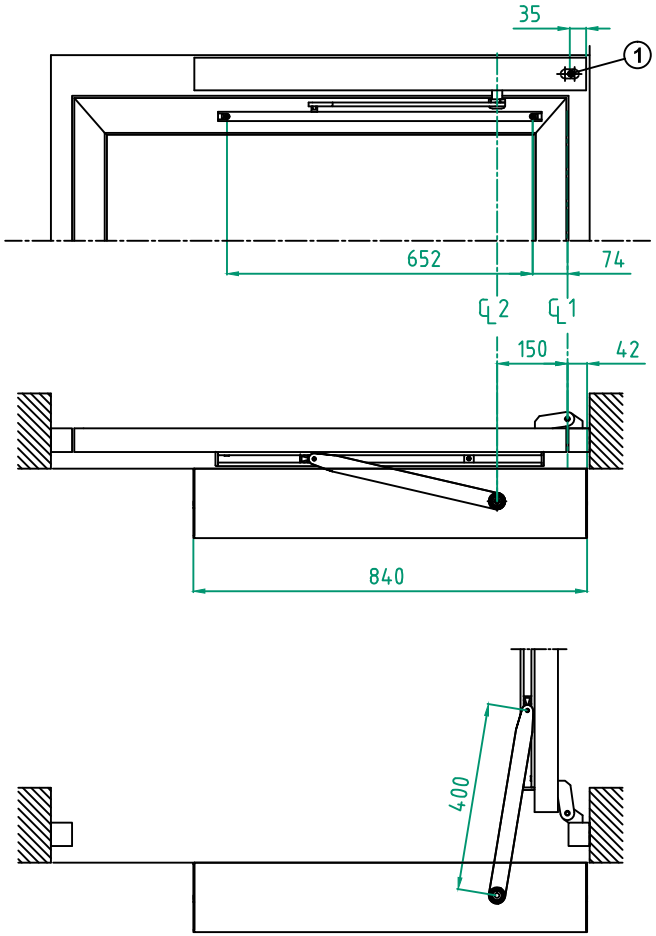

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm
  R = ... mm
  S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft

1 = Cable inlet
2 = Reinforcements required

X	Z	Shaft extension
2-25	48	0
25-45	68	20
45-75	98	50
75-95	118	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
Sliding PUSH-PULL-400, DIN Left

ASSA ABLOY

17.0 | 1009168-en

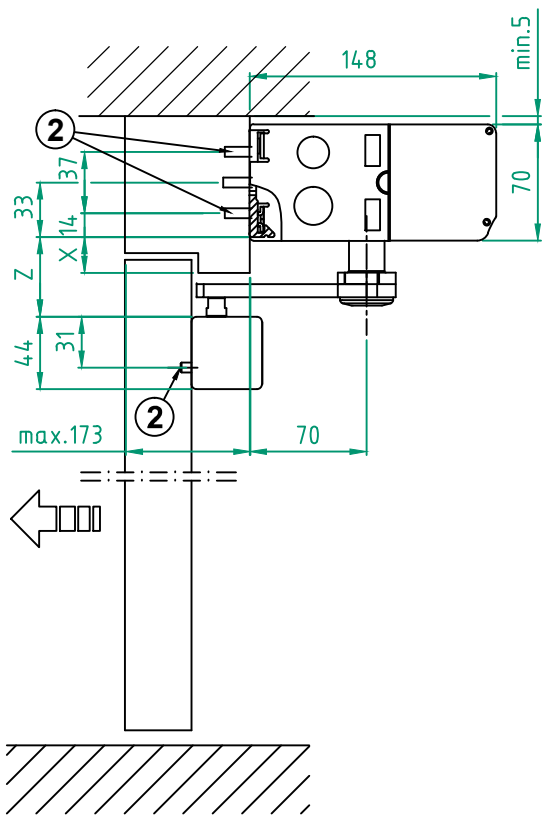

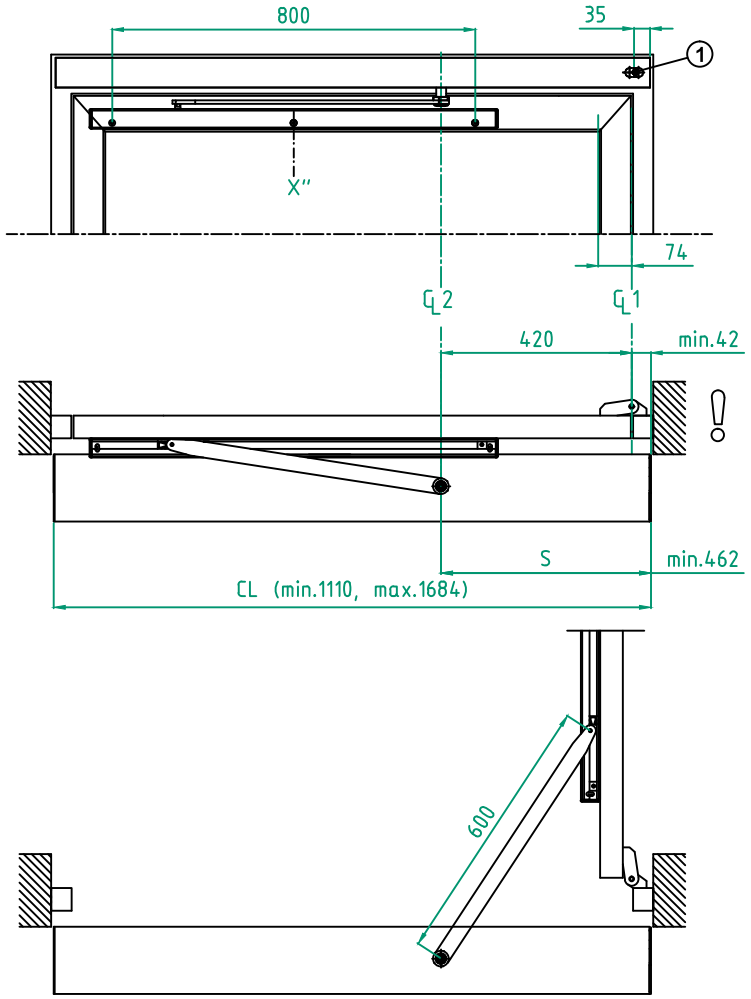

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Full length, CL = ... mm

R = ... mm
S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 230mm
X" = Center of the sliding block movement
1 = Cable inlet
2 = Reinforcements required

Note1! Low speed distance and closing will increase.
Max. door opening = 100°
Min. door width = 1200 mm
Note2! Dip switch 6 = OFF and 7 = OFF

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB, 2018
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1(Art. No. 1009168)
ASSA ABLOY SW150-1(Art. No. 1009169)
Sliding PUSH_PULL-600, DIN Left

ASSA ABLOY

17.0 | 1009168-en

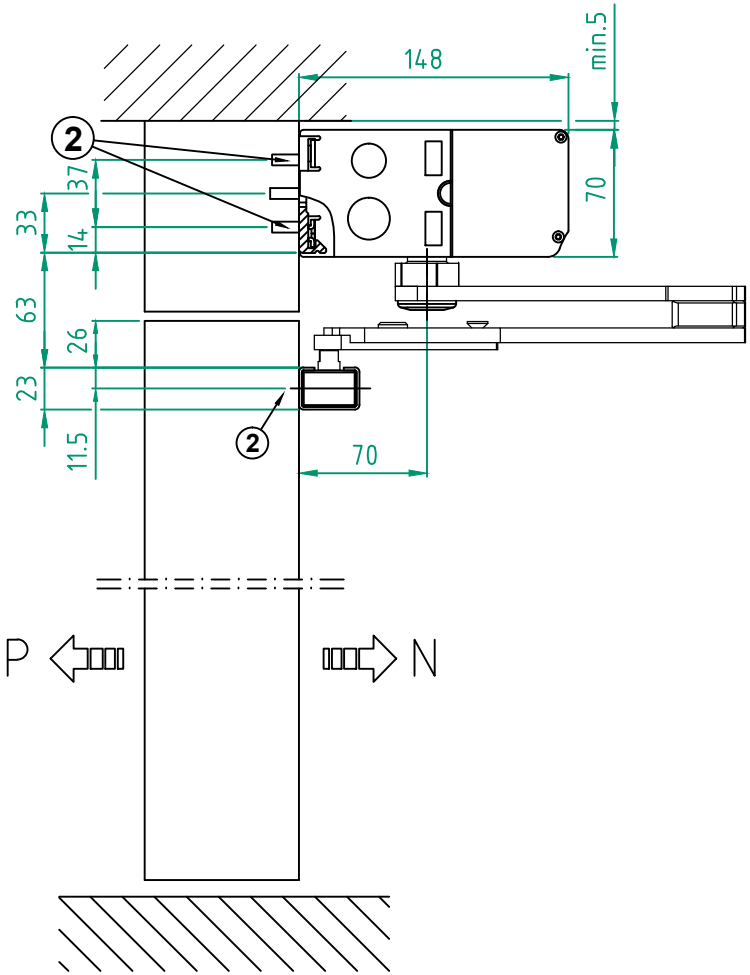

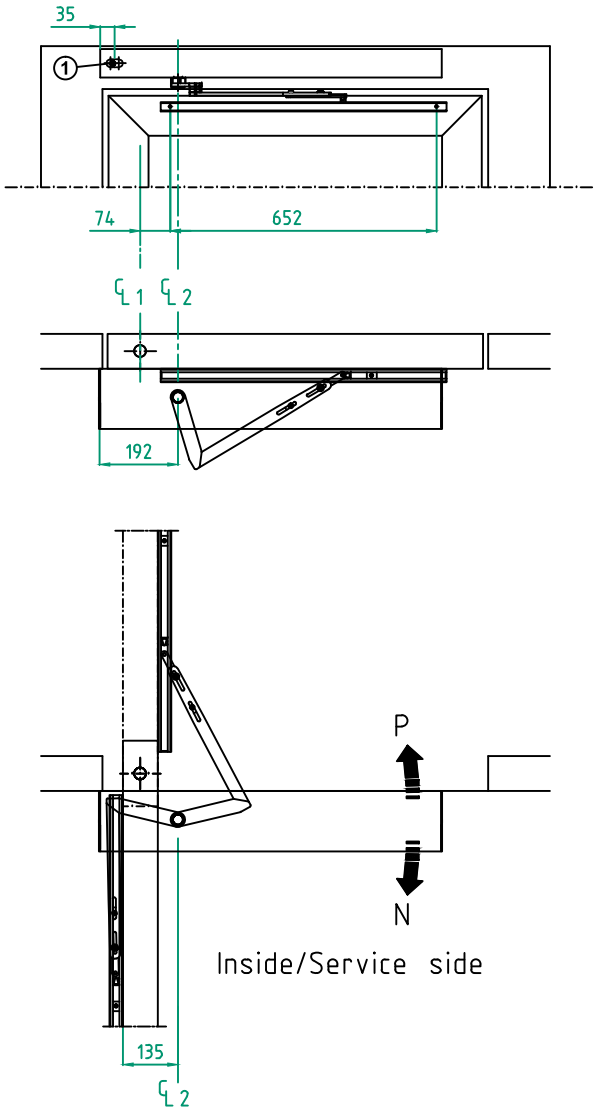

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

℄1	Pivot point
℄2	Operator drive shaft
1	Cable inlet
2	Reinforcements required
N	Normal opening direction
P	Break-out direction

© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:


Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)

Arm system Double Acting, DIN Left

ASSA ABLOY

17.0 | 1009168-en

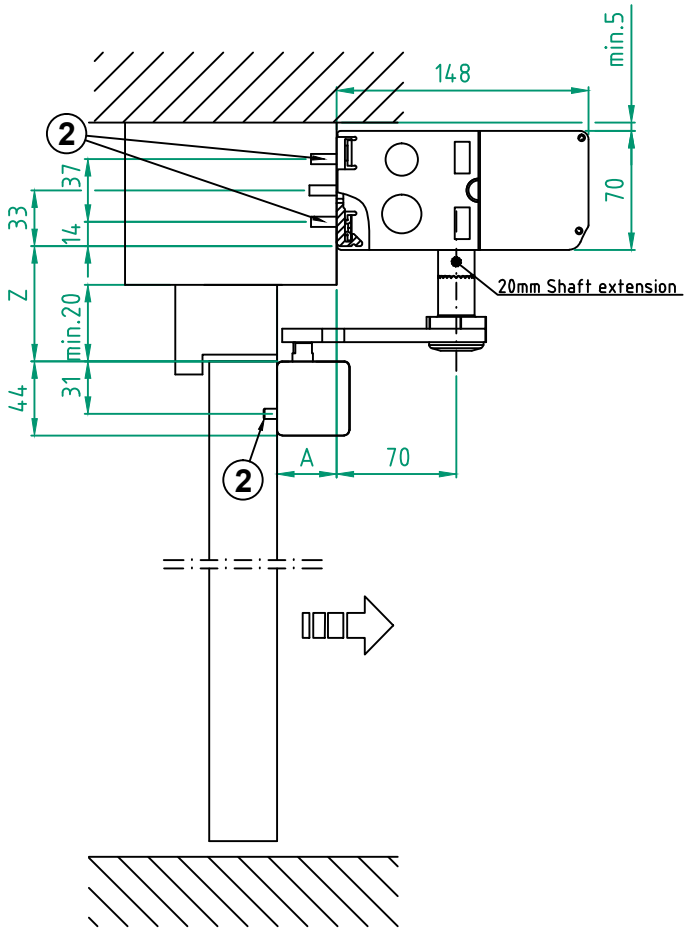

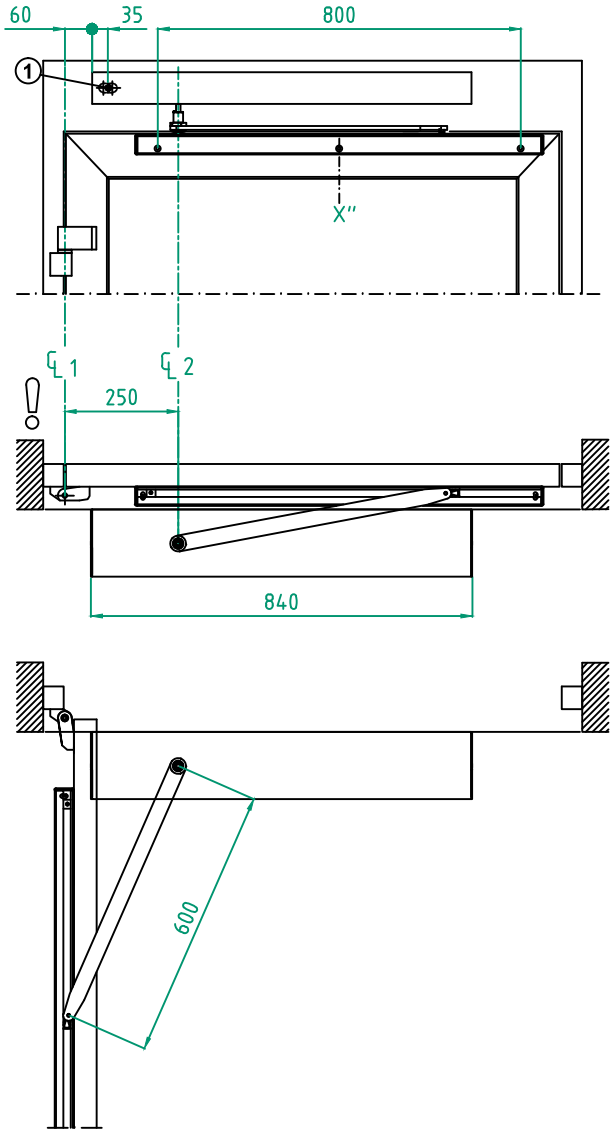

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm

R = ... mm
S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 230mm
X" = Center of the sliding block movement
1 = Cable inlet
2 = Reinforcements required
Note! Low speed distance and closing will increase.
Max. door opening = 110°
Min. door width = 1050 mm

Z	Shaft extension
48	0
68	20
98	50
118	70

© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:


Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PULL-600 250, DIN Left

ASSA ABLOY

17.0

1009168-en

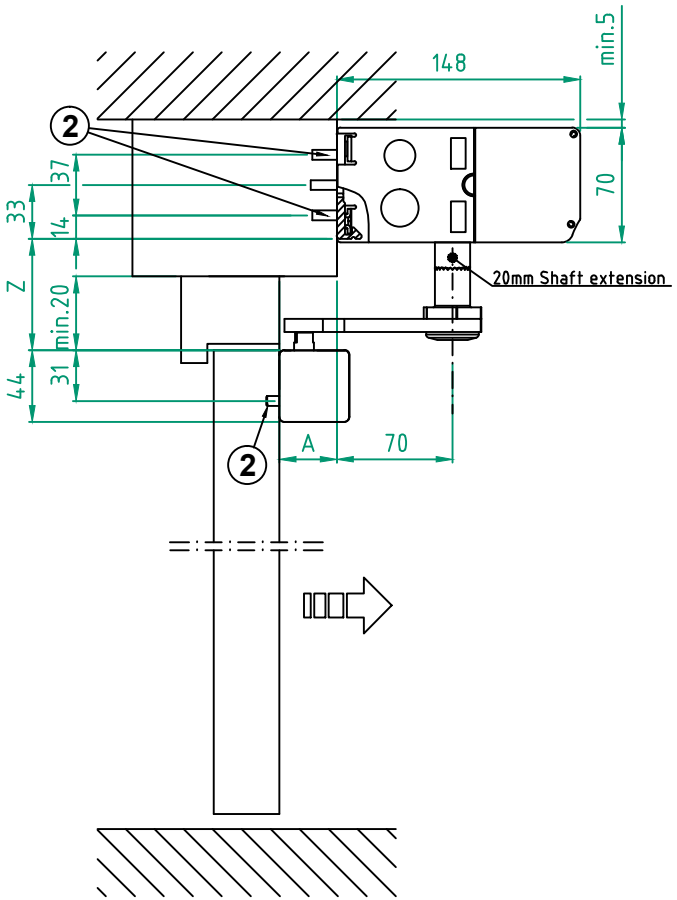

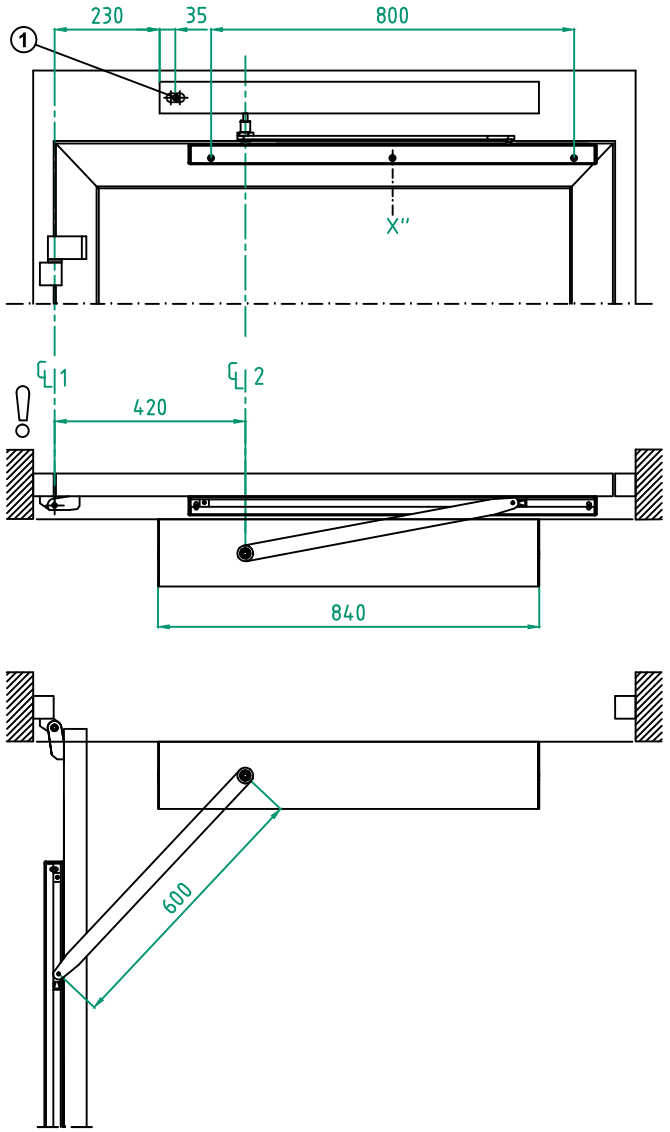

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers
- ☐ Cover Standard
- ☐ Cover Full length, CL = ... mm
  R = ... mm
  S = ... mm

If R or S is set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 230mm
X" = Center of the sliding block movement
1 = Cable inlet
2 = Reinforcements required
Note! Low speed distance and closing will increase.
Max. door opening = 100°
Min. door width = 1200 mm

Z	Shaft extension
48	0
68	20
98	50
118	70

© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.

Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-1 (Art. No. 1009168)
ASSA ABLOY SW150-1 (Art. No. 1009169)
PULL-600 420, DIN Left

ASSA ABLOY

17.0 | 1009168-en