

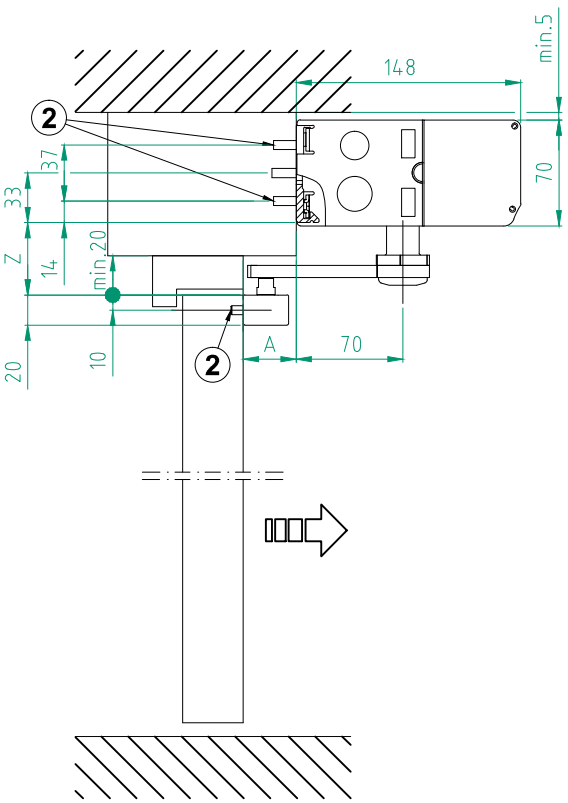


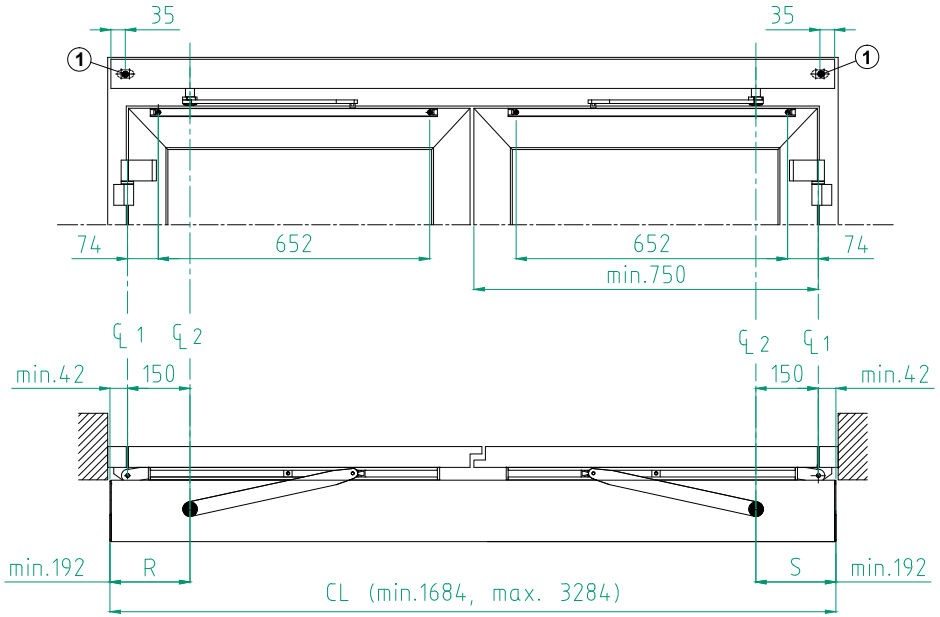

Note! If no coordinator and control units turned 180°, min. CL=1544

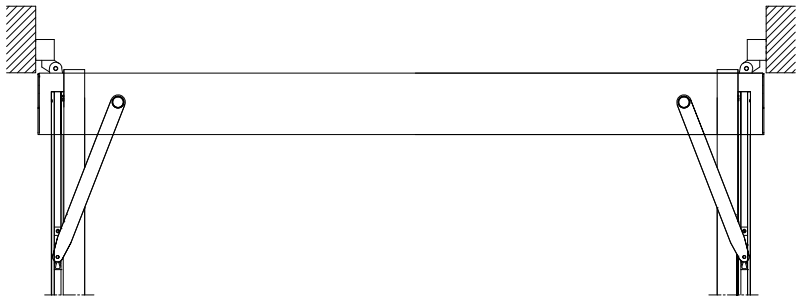

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers:
- ☐ Cover Modular, CL = ... mm
- ☐ Cover Full length, CL = ... mm
  - R = ... mm
  - S = ... mm

If R and S are set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL

ASSA ABLOY

16.0 | 1009172-en

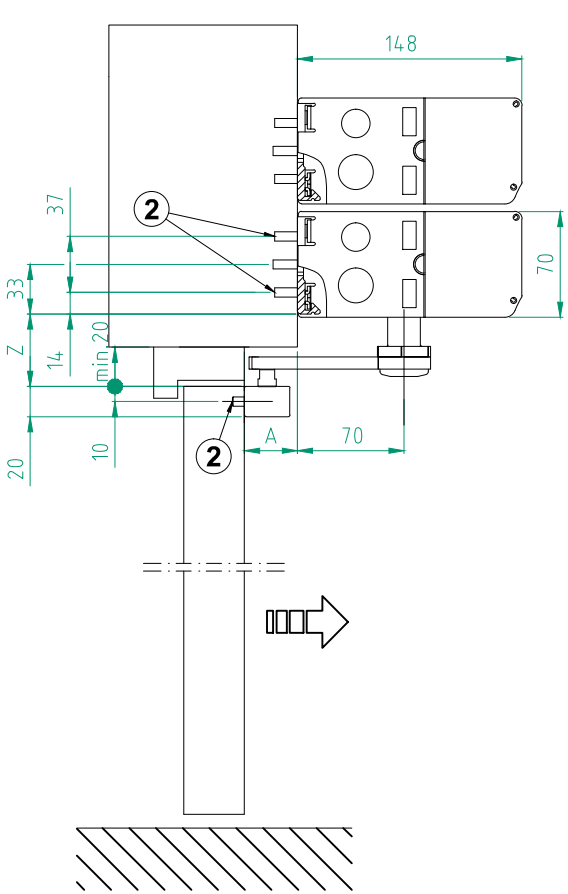

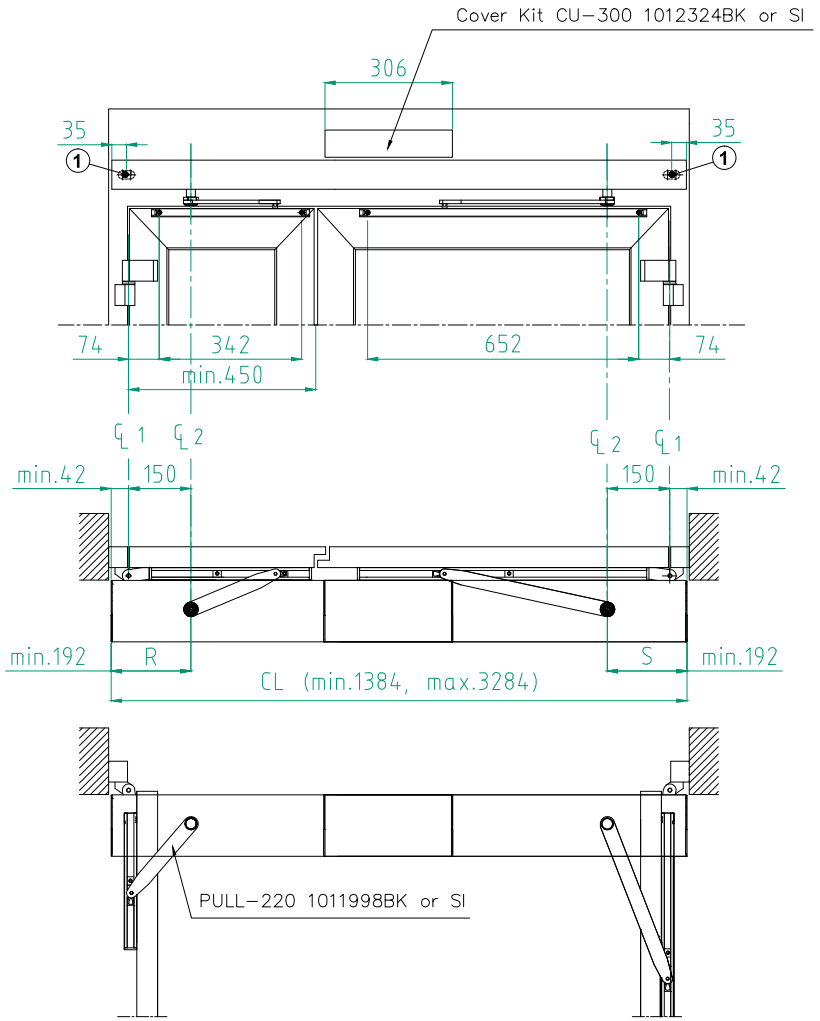

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized

Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

CL = ... mm
R = ... mm
S = ... mm
If R and S are set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 65mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB. 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL Narrow Door


ASSA ABLOY

16.0 | 1009172-en

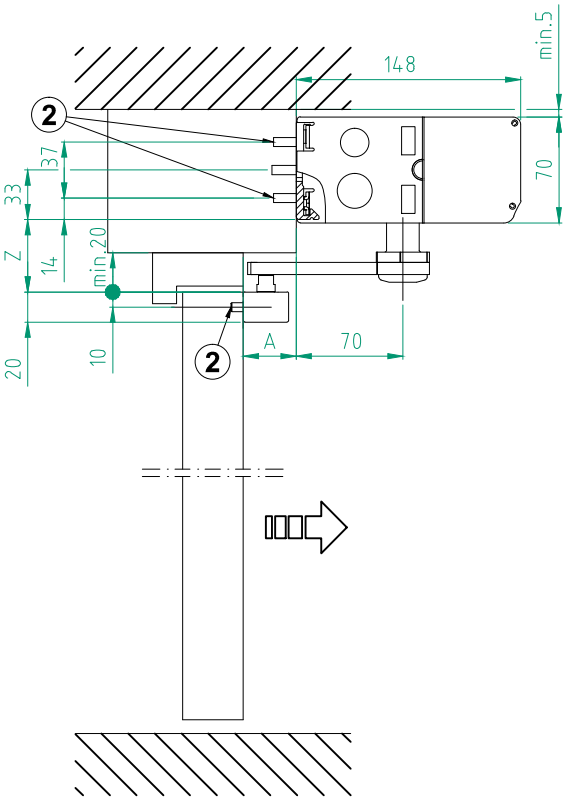

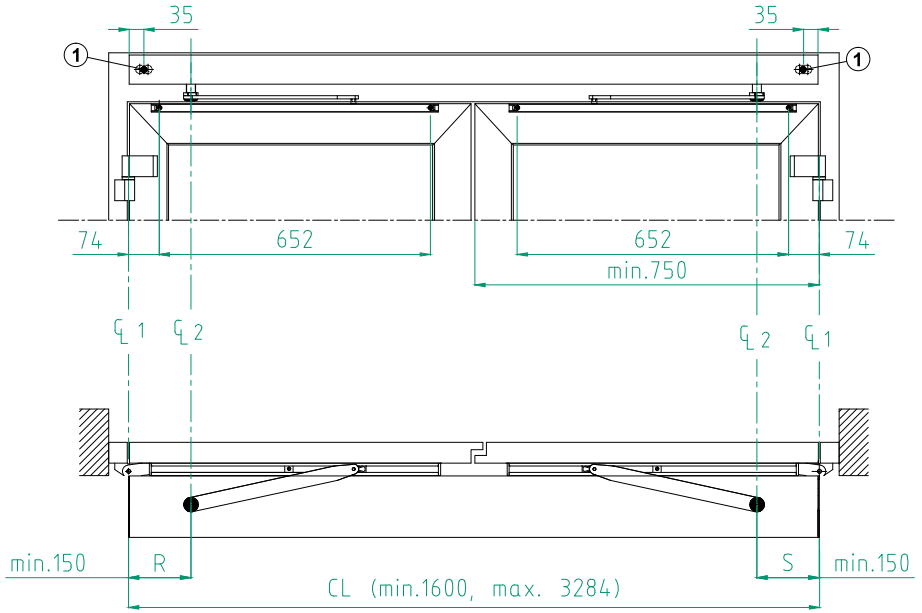

Note! If no coordinator and control units turned 180°, min. CL=1460

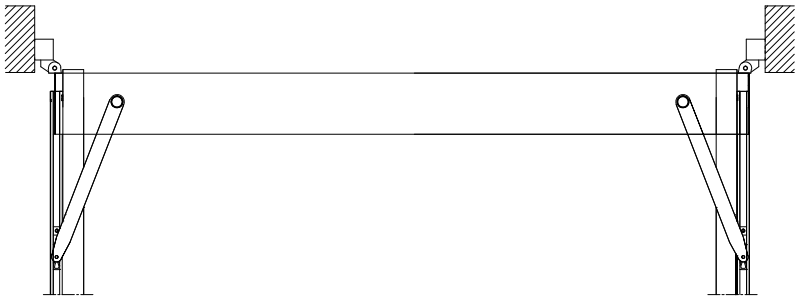

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

CL = ... mm
R = ... mm
S = ... mm
If R and S are set to "0", no cutouts will be made.
Note! No space for battery if R/S<192

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.

Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL with shorty cover

ASSA ABLOY

16.0 | 1009172-en

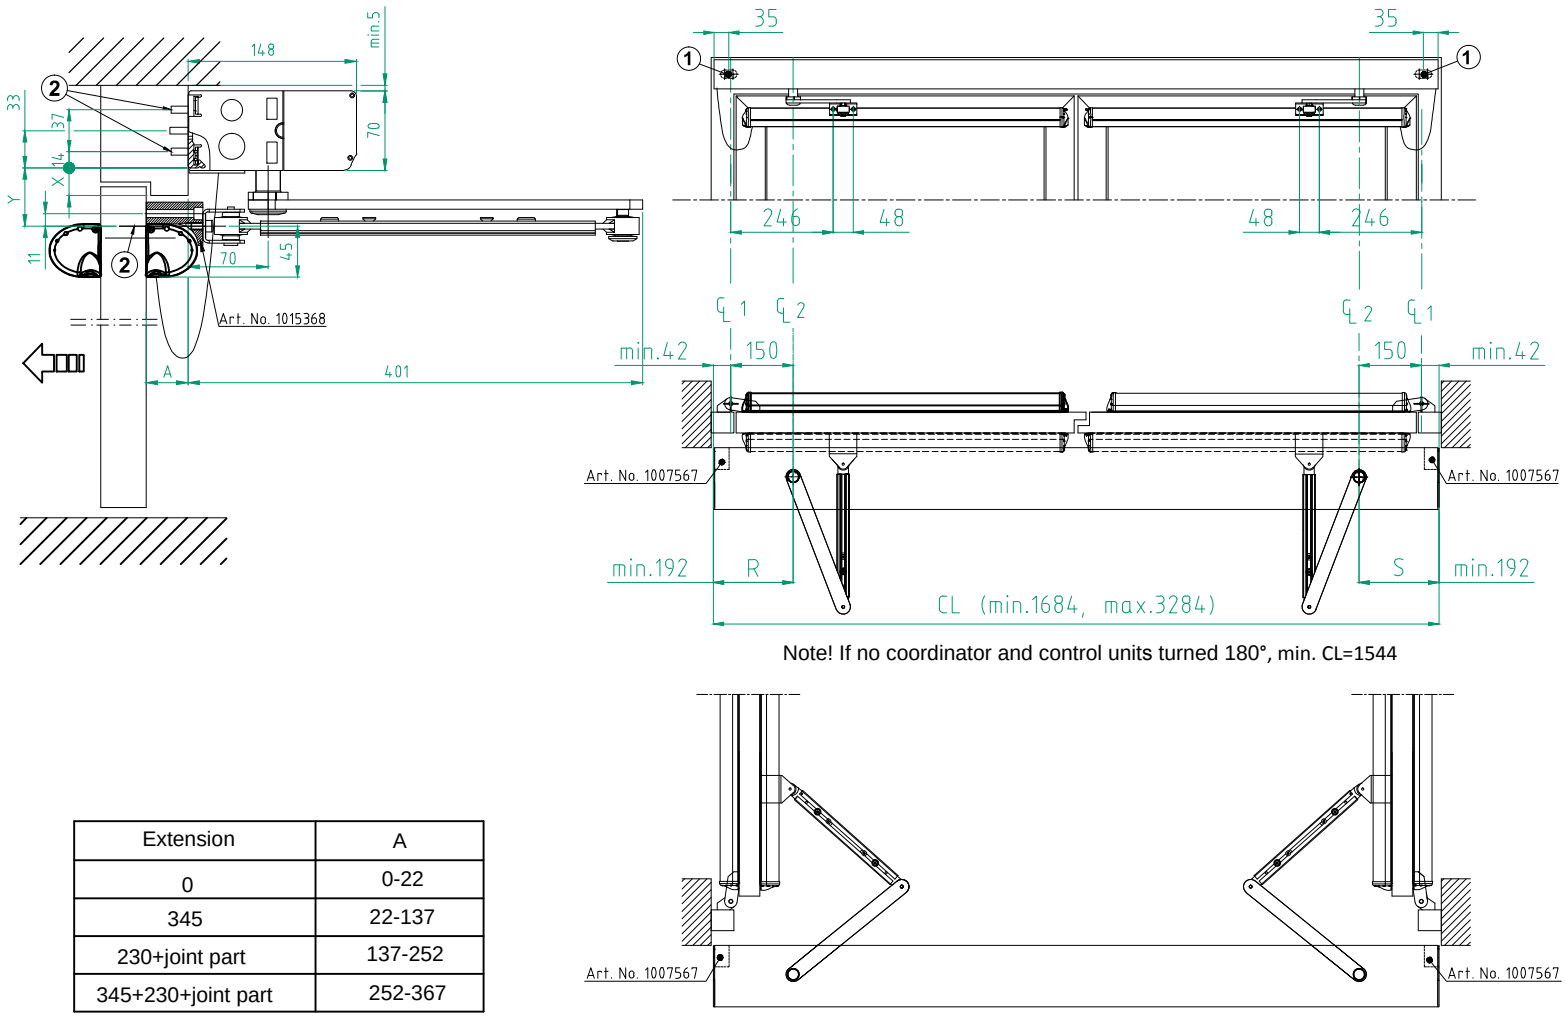

Note! If no coordinator and control units turned 180°, min. CL=1544

Extension	A
0	0-22
345	22-137
230+joint part	137-252
345+230+joint part	252-367

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers:
- ☐ Cover Modular, CL = ... mm
- ☐ Cover Full length, CL = ... mm
  - R = ... mm
  - S = ... mm

If R and S are set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft

1 = Cable inlet
2 = Reinforcements required

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PUSH

ASSA ABLOY

16.0 | 1009172-en

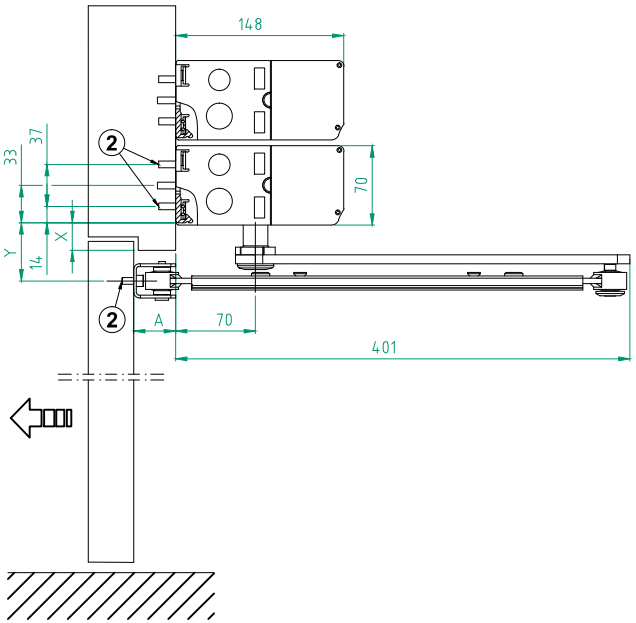

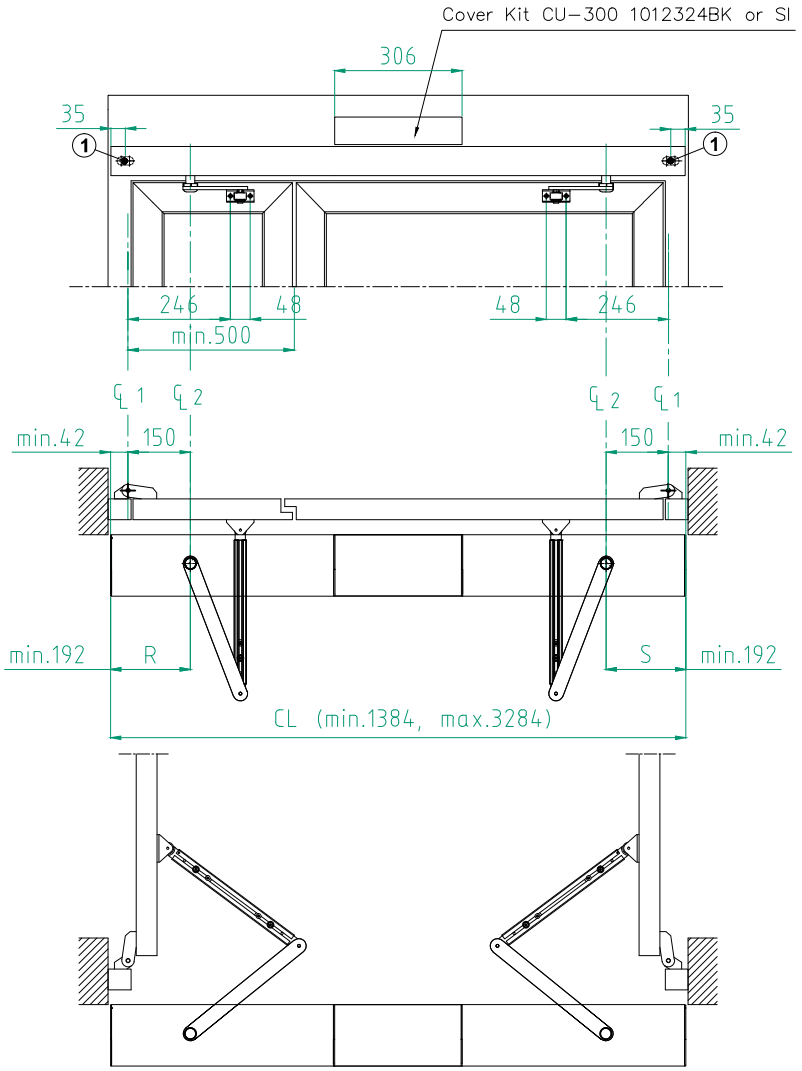

STATE WHEN ORDERING

Surface treatment

☐ Silver anodized
Special anodized .....
RAL .....
Special powder coating .....
.....

Cover end plates

☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

CL = ... mm
R = ... mm
S = ... mm
If R and S are set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal 0mm to 22mm, optional 300mm
1 = Cable inlet
2 = Reinforcements required

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PUSH Narrow Door

ASSA ABLOY

16.0 | 1009172-en

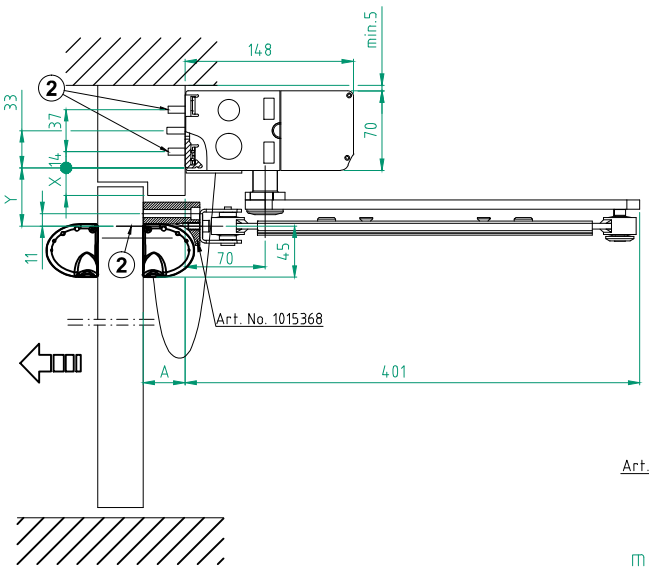

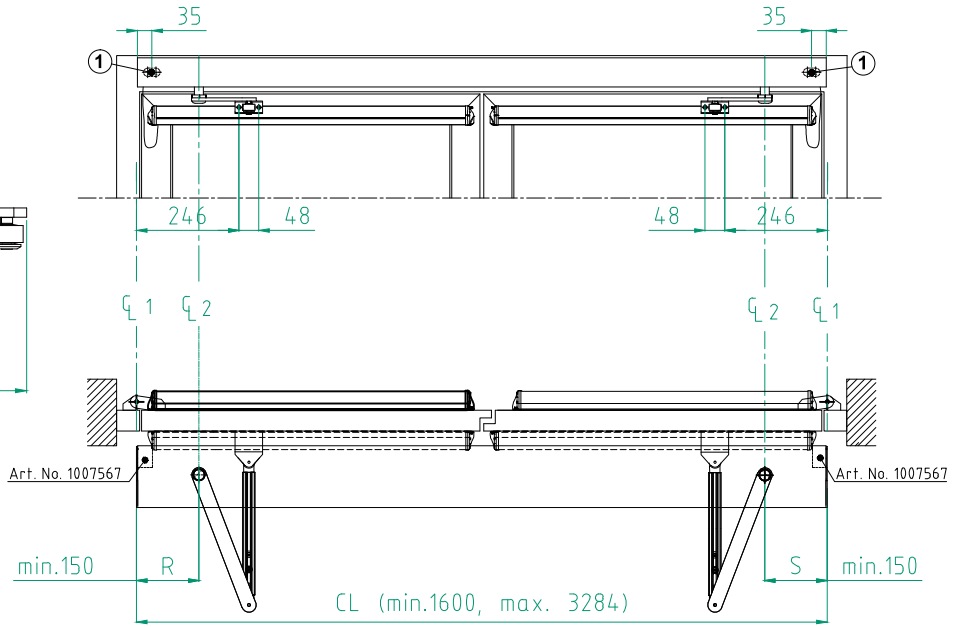

Note! If no coordinator and control units turned 180°, min. CL=1460



STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

CL = ... mm
R = ... mm
S = ... mm
If R and S are set to "0", no cutouts will be made.
Note! No space for battery if R/S<192

℄ 1 = Hinges
℄ 2 = Operator drive shaft

1 = Cable inlet
2 = Reinforcements required

Extension	A
0	0-22
345	22-137
230+joint part	137-252
345+230+joint part	252-367

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:


Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009172)
PUSH with shorty cover

ASSA ABLOY


16.0 | 1009172-en

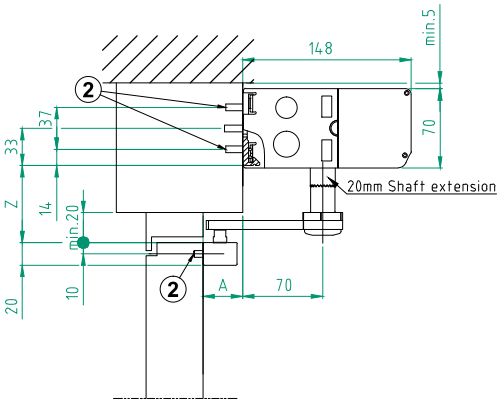

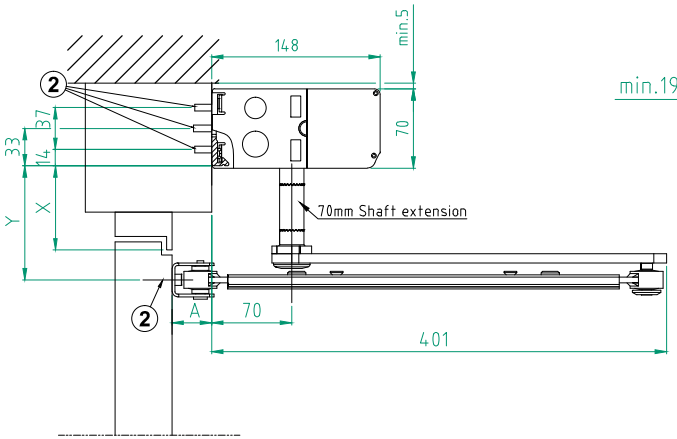

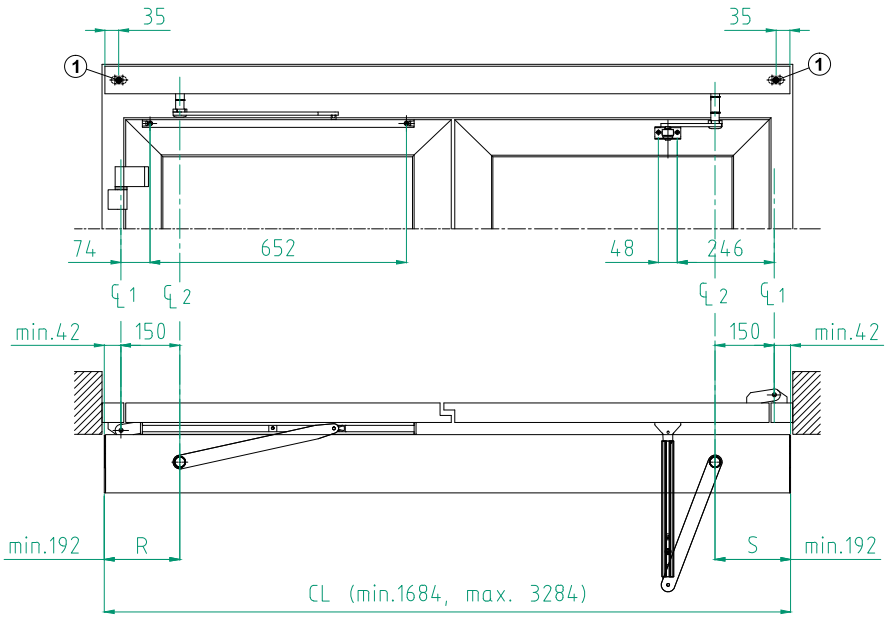

Note! If control units are turned 180°, min. CL=1544

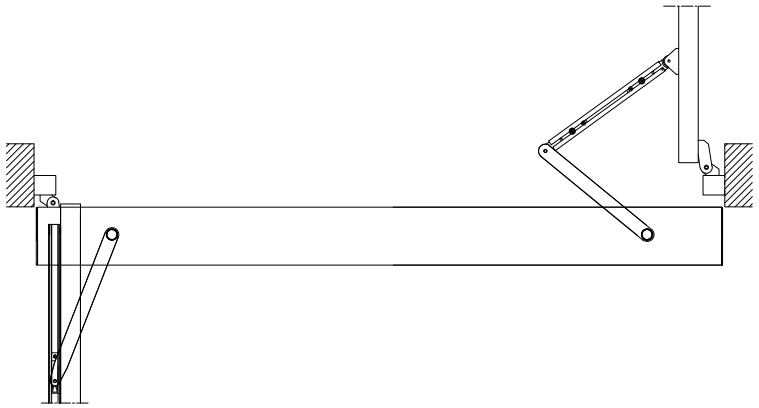

STATE WHEN ORDERING

Surface treatment
- ☐ Silver anodized
- Special anodized .....
- RAL .....
- Special powder coating .....
- .....

Cover end plates
- ☐ BK
- ☐ SI

- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers:
- ☐ Cover Modular, CL = ... mm
- ☐ Cover Full length, CL = ... mm
  - R = ... mm
  - S = ... mm

If R and S are set to "0", no cutouts will be made.

℄ 1 = Hinges
℄ 2 = Operator drive shaft
A = Reveal 0mm to 22mm, optional 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Pull Shaft extension
48	0
68	20

X	Y	Push Shaft extension
45-75	101	50
75-95	121	70


© ASSA ABLOY Entrance Systems AB, 2019
Technical data subject to change without notice.


Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOYSW150-2(Art. No. 1009173)
PULL+PUSH

ASSA ABLOY

16.0 | 1009172-en

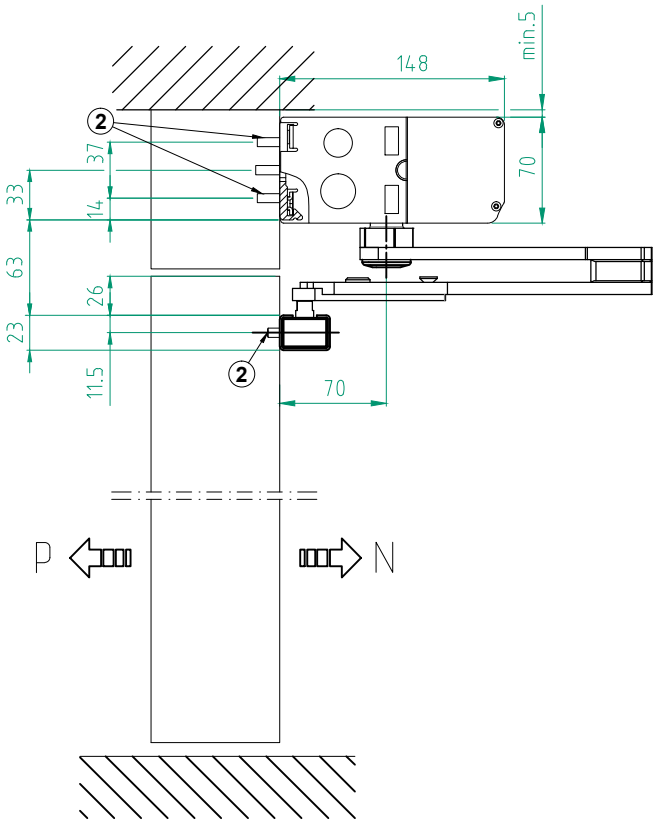

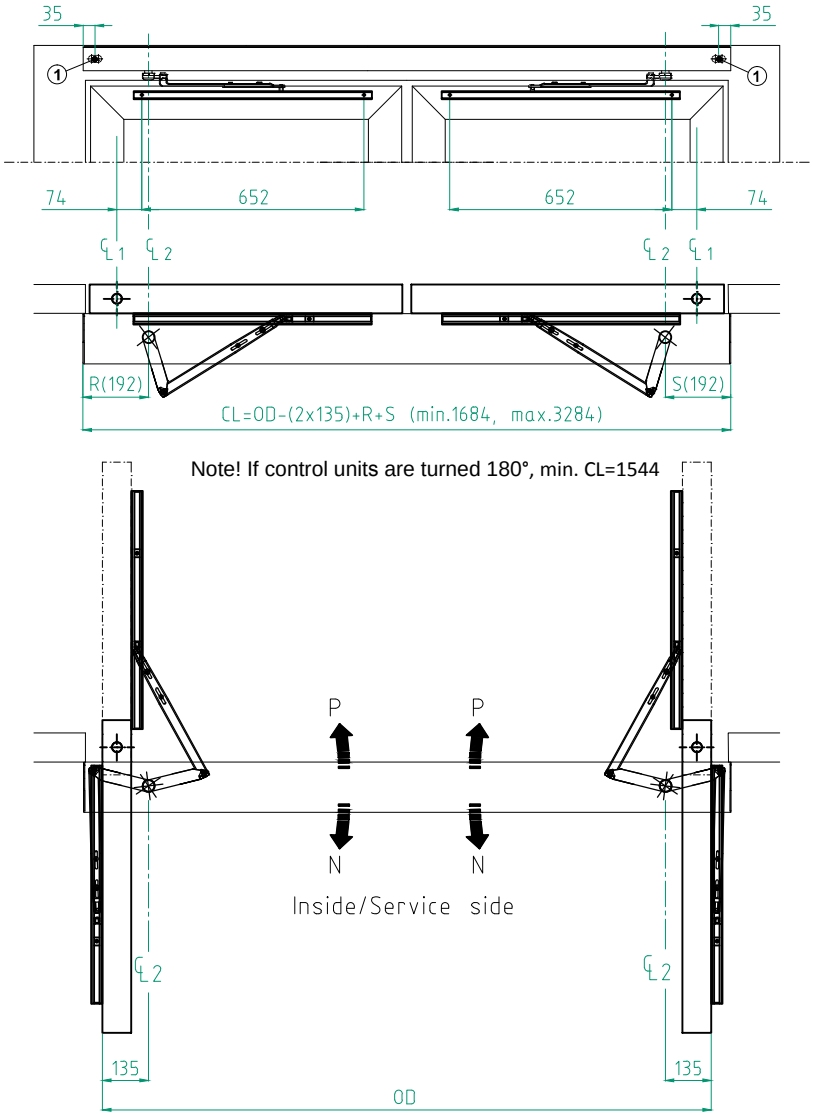

STATE WHEN ORDERING

Surface treatment

☐ Silver anodized

Special anodized .....

RAL .....

Special powder coating .....

.....

Cover end plates

☐ BK

☐ SI

☐ Basic

☐ Fire door

☐ Connection box

☐ Connection plug

OD = ... mm

CL = ... mm

If R and S are set to "0", no cutouts will be made.

℄1	Pivot point
℄2	Operator drive shaft
1	Cable inlet
2	Reinforcements required
OD	Outside doors
N	Normal opening direction
P	Escape opening direction

© ASSA ABLOY Entrance Systems AB. 2019
Technical data subject to change without notice.

Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing door operator
ASSA ABLOY SW300 DA-2
Arm system Double Acting

ASSA ABLOY

16.0 | 1009172-en